
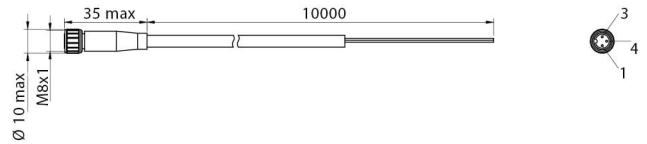


CD

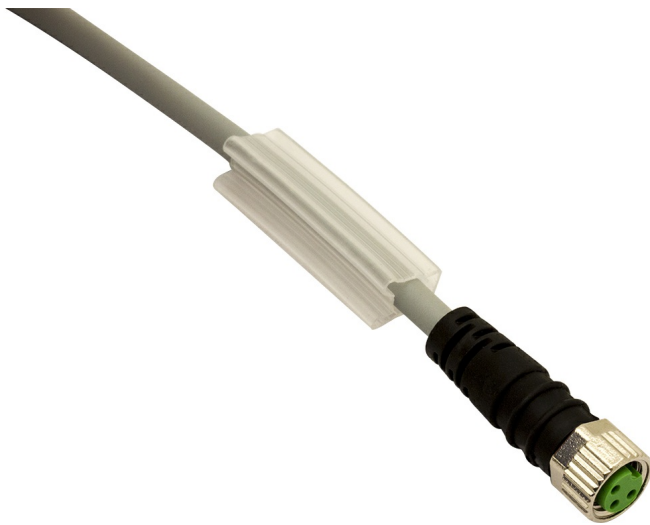

Indicative image

## Electrical data

Nominal current	4 A
Led	no
Wires	3
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 60 V ac/dc

## Mechanical data

Connections	With open ended wires
Tightening torque	0,4 Nm
Operating temperature	-25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation)
1	10
Head type	Axial
Plug	M8
Outer diameter	Ø 4.1 mm ± 5%
Jacket material	PUR
Wire isolation	PP
Conductors section	0,25 mm <sup>2</sup> (32 x 0,10 mm <sup>2</sup> )
Model	Femmina

## Test/Approvals

Approvals	cCSAus
-----------	--------

Degree of protection

IP67

#### General Data

Operating Temperature

-25°C... +80°C (flexible installation)-25°C ... +80°C (fixed installation)

Mechanical Protection

IP67

---

## ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---

BN/1



BU/3



BK/4



---

### Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@datasensing.com](mailto:info@datasensing.com)

### date of printing

29/04/2022 12:29:05